





NivuFlow Mobile 550

For contactless flow metering with Radar-Doppler in part filled pipes and channels. The well thought-out power management and the built-in modem allow long-term measuring with automatic data transmission.

NivuFlow Mobile 550 permits contactless flow metering in a variety of different situations. Hydraulic algorithms determine the exact flow profiles for almost all shapes.

The modern operating concept via web browser in connection with tablet, smartphone etc. is intuitive and enables quick commissioning. Here, a quick start assistant guides through the most relevant parameter settings. While setting parameters, the remaining

operation time is indicated in days. The optional built-in modem provides automatic data transmission via e-mail, FTP or to the NIVUS WebPortal. The energy-efficient system allows for accurate scheduling of maintenance visits and very long operation times.

Typical Applications

- WWTP intakes
- Irrigation channels
- Tributaries




Dimensions in mm


-				67		
_	ro	ne	m	п	17	٦r
_	па	пэ			44	- 1

Measurement principle	Doppler Radar
Power supply	• 2 x rechargeable batteries 12V/15 Ah, lead gel
	 charger 100 - 240 V AC / 50 to 60 Hz / 50 VA
Enclosure	Material: HPX high-performance synthetic resin
	Weight: approx. 4.7 kg
	(without battery and hoop guards)
	Protection: IP68 closed / IP67 open
Operating temperature	- 20°C to + 50°C / - 15°C to + 50°C for Ex-Zone 1
Storage temperature	- 20°C to + 70°C
Max. humidity	90 %, non-condensing
Display	via mobile device; status LED (RGB)
Ex-Approval	Optional: II 2G Ex eb ib [ib] mb IIB T4 Gb
	TÜV 17 ATEX 196722 X / IECEx 18.0008X
Operation	Magnetic switch, via WiFi using smartphone,
	tablet, notebook
Inputs	 1x socket for OFR-Radarsensor or
	ConnectorBox for external mains adaptor or
	power supply as well as:
	 2x 0/4 - 20 mA (active/passive)
	 1x 0/4 -20 mA (passive)
	 1x active digital input
	1x level sensor socket
	1x antenna socket
Outputs	via ConnectorBox
	 1 x analog output 0 - 10 V
	 1 x potential-free digital output
	as SPDT / bistable
	• 1 x USB or readout of values via USB stick
Storage cycle	5 sec 360 min, continuous, cyclic or event-based
Data memory	Internal memory, covering a period of 1.5 years
	at a measurement interval of 5 minutes
Data transmission	Via plug-in USB stick
	Via WLAN
	Via GPRS, UMTS, LTE
Operation time	~1 year on one battery charge* (two batteries)
	· · · · · · · · · · · · · · · · · · ·

^{*}calculated value with storage cycle 60 minutes and daily data transmission. Value may vary according to measurement spot or age of batteries

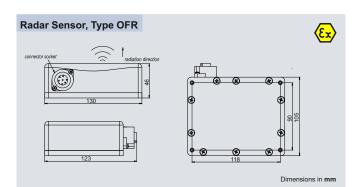

OFR Radar Senso	or		
Measurement method	Radar - 24 GHz - ISM band		
Measurement range	± 0.15 m/s - 15 m/s		
Temperature range	-30 °C to 70 °C		
	-20 °C to 60 °C in ATEX Zone 1		
Measurement distance	0.05 m - 10 m		
to surface			
Minimal wave height	~ 3 mm		
Protection	IP 68 - completely encapsulated		
Enclosure material	Polyoxymethylene (POM)		
Interface	RS485 for connection to NivuFlow or		
	NivuFlow Mobile transmitters		
Measurement uncertainty	± 0.5 % of raw measurement value;		
	± 0.01 m/s (rel. to surface velocity)		
Ex Approval	II 2 G Ex ib IIB T4 Gb; TÜV 16 ATEX		
	185271X;IECEx 16.0034X		



CX/	
Dimensions in mm Type i-3	

i-Series Level Sensor				
Measurement method	Ultrasound			
Measurement range	0.125 m to 10 m (15 m optional)			
Power supply	10 - 28 V DC			
Outputs	HART® – loop powered (2-wire)			
	4 - 20 mA (3.8 - 22 mA)			
Functions	level, distance, empty space, volume			
	and linearisation using 16 breakpoints			
Operating temperature	-40 to 80 °C			
Configuration	PC software for parameter setting, echo			
	evaluation, linearisation and agitator			
	avoidance			
Sensor body material	Valox 357 PBT, optional: PVDF			
Protection	IP68			
Ex Approval	II 2G Ex mb IIC T4 Gb / II 1G Ex ia IIC T4 Ga			
	TRAC12ATEX0031X / TRAC12ATEX0030X			
Startup time	4 sec. typical			
Measurement uncertainty	0.25 % (Type i-3)			
Resolution	2 mm (Type i-3)			

The complete technical specifications can be found in the Technical Documentation or on www.nivus.com

